


## Hutpaneel AK - sichtbare Befestigung

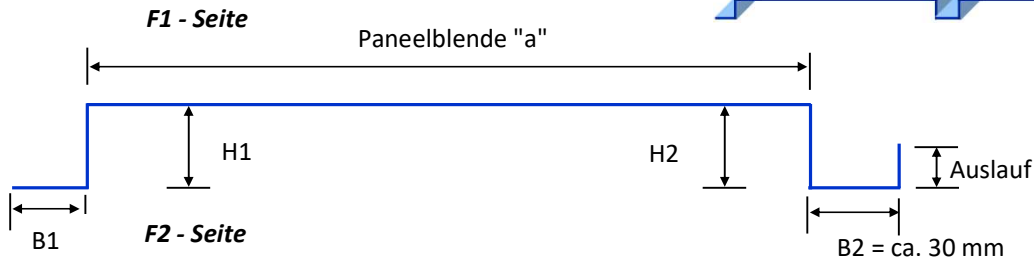

Paneelblende "a" [mm]: 130/190/290

Beschichtung	Alu 25 µm/ RSL	Stahl 25 µm/ RSL												
		Farbe	Dicke [mm]	0,50	0,70	0,80	1,00	1,50	2,00	0,50	0,63	0,75	1,00	1,50
1015										x				
3009					x									
5010										x				
6003														
6005					x					x				
6009														
6011										x				
7016					x	x				x				
7021														
7035										x				
8004														
8011										x				
8012										x				
8016					x									
9002					x					x				
9005												x		
9006					x	x	x			x				
9007					x	x				x				
9010					x					x				
9016												x		
Dark Oak					x									

blank-stucco					walzblank				
0,35	0,50	0,70	0,80	1,00	0,50	0,70	1,00	1,50	2,00
				x			x	x	x

- Sichtbare Befestigung
- Standardbauhöhe: ca. 25 [mm], weitere Höhen auf Anfrage möglich
- Standardpaneelblendenbreiten "a": 130/190/290 [mm]
- weitere Paneelblendenbreiten "a" auf Anfrage möglich
- Lieferlängen bis 6.200 [mm]
- Kopfkantungen möglich
- Start- und Abschlußpaneel möglich
- optional mit werksseitigen Fest- und Gleitpunkten lieferbar