
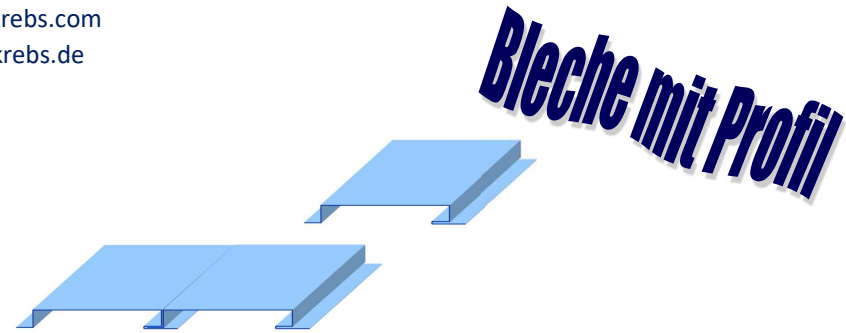


Klemmpaneel-AK - verdeckte Befestigung

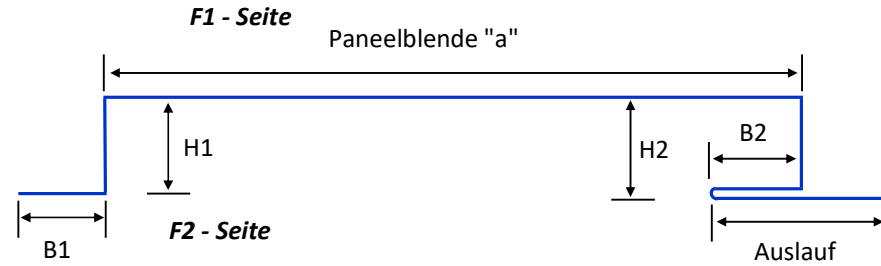

Panelblende "a" [mm]: 110/210

Beschichtung	Farbe	Dicke [mm]	Alu 25 µm/ RSL						Stahl 25 µm/ RSL					
			0,50	0,70	0,80	1,00	1,50	2,00	0,50	0,63	0,75	1,00	1,50	2,00
1015														
3003														
3009					x									
5010														
6003														
6005					x									
6009														
6011														
7016					x									
7021														
7035														
8004														
8012														
8014														
8016					x									
9002					x									
9005														
9006					x									
9007					x									
9010					x									
Dark Oak					x									

blank-stucco					walzblank				
0,35	0,50	0,70	0,80	1,00	0,50	0,70	1,00	1,50	2,00
				x			x		

- Verdeckte Befestigung
- Standardbauhöhe: ca. 35 [mm], weitere Höhen auf Anfrage möglich
- Standardpanelblendenbreiten "a": 110/210 [mm]
- weitere Panelblendenbreiten "a" auf Anfrage möglich
- Lieferlängen bis 6.200 [mm]
- Kopfkantungen möglich
- Start- und Abschlußpaneel möglich
- optional mit werksseitigen Fest- und Gleitpunkten lieferbar