
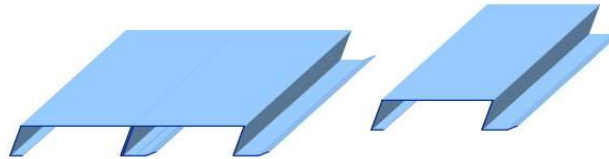


## Stoßpaneel-AK - verdeckte Befestigung

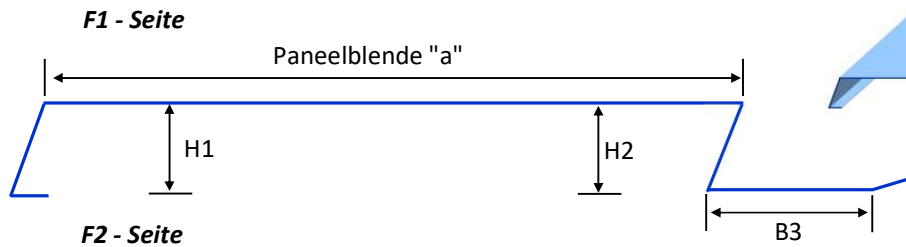

Panelblende "a" [mm]: 140/200/300

Beschichtung	Farbe	Dicke [mm]	Alu 25 µm/ RSL						Stahl 25 µm/ RSL					
			0,50	0,70	0,80	1,00	1,50	2,00	0,50	0,63	0,75	1,00	1,50	2,00
1015										x				
3009						x								
5010										x				
6003														
6005						x				x				
6009														
6011										x				
7016						x	x			x				
7035										x				
8004										x				
8011										x				
8012										x				
8014														
8016						x								
9002						x				x				
9005												x		
9006						x	x	x		x				
9007						x	x			x				
9010						x				x				
9016												x		
Dark Oak					x									

blank-stucco					walzblank				
0,35	0,50	0,70	0,80	1,00	0,50	0,70	1,00	1,50	2,00
				x			x	x	x

- Verdeckte Befestigung
- Standardbauhöhe: ca. 25 [mm], weitere Höhen auf Anfrage möglich
- Standardpanelblendenbreiten "a": 140/200/300 [mm]
- weitere Panelblendenbreiten "a" auf Anfrage möglich
- Lieferlängen bis 6.200 [mm]
- Kopfkantungen möglich
- Start- und Abschlußpaneel möglich
- optional mit werksseitigen Fest- und Gleitpunkten lieferbar